



## Photo / sizes:

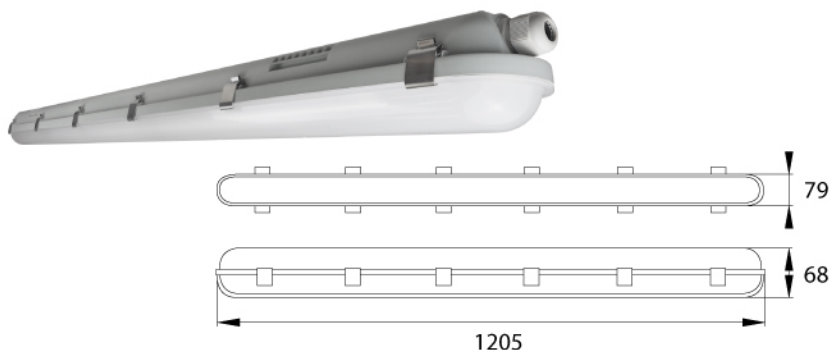

## Spectral power distribution:

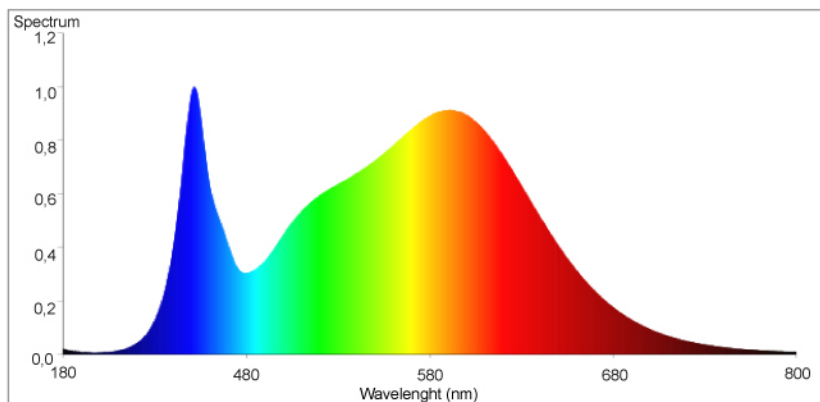

## Energy label:

This luminaire contains built-in LED lamps.

**A++** } **LED**

**A+** }

**A** }

**B** }

**C** }

**D** }

**E** }

The lamps cannot be changed in the luminaire.

874/2012

<b>EAN:</b>	<b>5900280944207</b>
Rated voltage	230V~
Rated frequency	50Hz
Rated power	40W
Power factor	cos(φ) > 0,9
Luminous flux	6000lm
Color tempetarure / Light color	4000K / Neutral white
Beam angle	120°
Color consistency	≤6
Colour rendering	Ra>80
Number of switching cycles (on / off)	30000
Life time	50000h
Rated peak intensity in candela (cd)	1909,9cd
Starting time	<1s
Warm-up time up to 60% of the full light output	<1s
Lumen maintenance factor at the end of the nominal life	≥ 65%
Premature failure rate	< 5% po 1000h
Distance from lighted objects	0,5m
Housing material	PC (Polycarbonate)
Lampshade material	PC (Polycarbonate)
Internal wiring	Type: H05V-U / DY Diameter: 0,5mm2 Material wiring: Copper
Gasket material	Silicone
Mercury content	0,0mg
Class of protection against electric shock	Class I
Class IP	IP65
Class IK	IK08
Working temperature	-20°C + 40°C
Lamp is not suitable for accent lighting	YES
Lamp is not dimmable	YES
Photobiological security risk group (EN 62471)	RG0 (No photobiological hazard)
Weight (net / gross)	1273g / 1492g
Packing (single / multi)	1pcs / 15pcs